FILE NO: DVI-02264

DESCRIPTION CONTROL			
REV	DESC	DATE	ECN NO

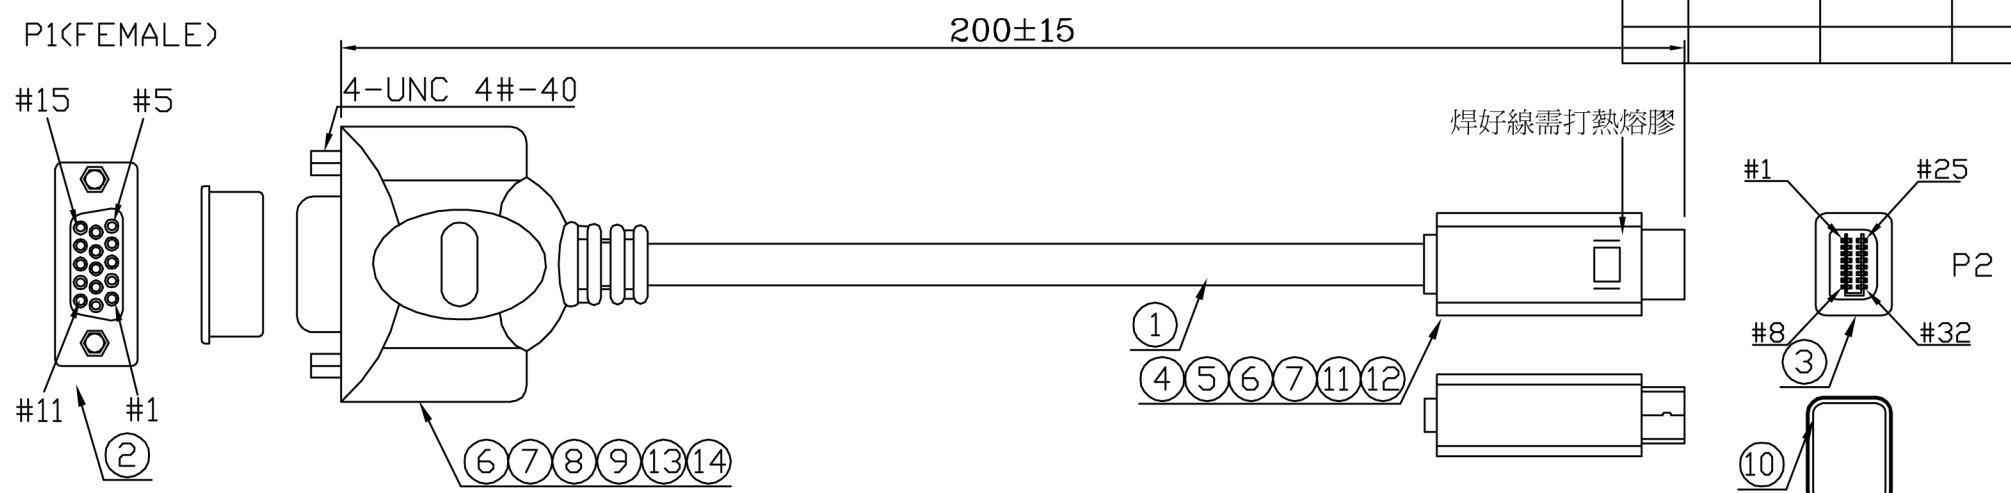

隨訂單P/O變化而變化

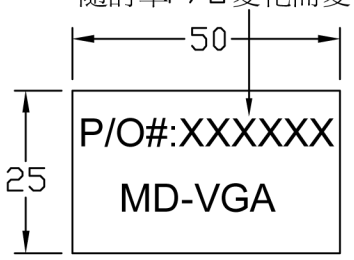





*	390	LABEL:"MD-VGA"50*25MM	2/400	PCS
*	390	LABEL:"MD-VGA 10PCS"30*20MM	1	PCS
*	390	LABEL:"MD-VGA"30*20MM	1	PCS
*	390	CARTON:46*30*25CM	1/400	PCS
*	390	PE BAG:30"*28"*0.08MM	1/400	PCS
*	390	PE BAG:7"*12"*0.06MM	1/10	PCS
*	390	PE BAG:3"*11"*0.06MM	1	PCS
14	200034000033	HT-TUBE-OD:2.0MM<薄型>	8.0*3	MM
13	200034000032	HT-TUBE-OD:1.0MM<薄型>	12.0*3	MM
12	200034000033	HT-TUBE-OD:2.0MM<薄型>	6.0*3	MM
11	200034000206	HT-TUBE-OD:0.8MM<薄型>	10.0*3	MM
10	370	PVC-TT02/50P<MOLD 2PCS CAP>	5.0	G
9	370	FOIL-CU-22MM	65.0*1	MM
8	370	HI TEAMP TAPE:W:26MM	80.0*1	MM
7	120020000001	PE-5321	8.5	G
6	370	PVC-WH39/50	33.0	G
5	230	MINI-DVI下殼(白色)	1	PCS
4	230	MINI-DVI上殼(白色)	1	PCS
3	220	MINI-DVI32P	1	PCS
2	220	CDS-15S<BK>/NUTS	1	PCS
1	210	(32AWG*1C+S)*3C+30#*6C+A+B -WH39-5.5UL20276 <聯穎或同級品>	0.19	M
NO	PART NO.	DESCRIPTION	QTY	UNIT

PIN ASSIGNMENT

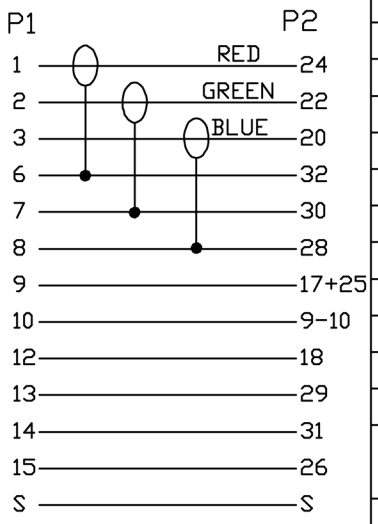

NOTE:
1. 1PCS裝一個小PE袋,每10PCS一中袋
2. REF:DVI-2227

RoHS COMPLIANT

ELECTRICAL PROPERTIES:
1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance: 10 ohm
3. Inulaton Resisance: 5M ohm
4. Hi-POT:300V AC/10ms

OUTER MOLDING	AV.404	MF371	AV.406	AV.407	
INNER MOLDING	AV.403				

ITEM: DVI000000002264		REV A
DRAWN,BY:ZHONG	SCALE:NONE	DATE:2008/06/11
CHECKED,BY:	CUSTOMER:C127	PAGE:1/1
APP'ED,BY:	CUSTOMER P/N: MD-VGA	
ALL DIMENSIONS IN mm		